

FYLF- 1140UB1C


Features:

- High intensity
- General purpose leads
- RoHs Complant.


Descriptions:

- Dice material: InGaN.
- Emitting Color: Super bright Blue.
- Lens Type: Water clear

Radiation pattern.

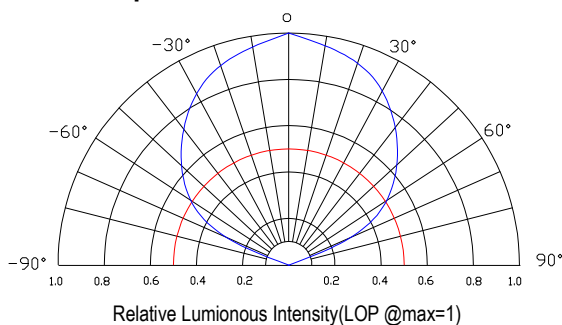

Package configuration

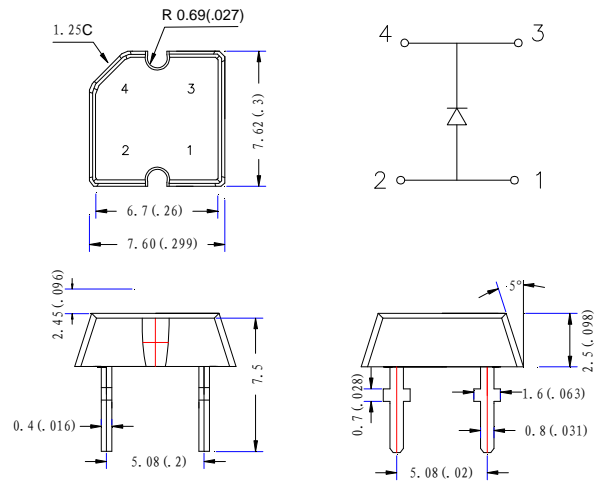

- ◆ All dimensions are millimeters (inches)
- ◆ Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.






Absolute maximum ratings(Ta=25 °c)

| Parameter | MAX. | Unit |
|---|---------------------|-------|
| Power Dissipation | 70 | mW |
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 100 | mA |
| Continuous Forward Current | 20 | mA |
| Derating Linear From 50°C | 0.4 | mA/°C |
| Reverse Voltage | 5 | V |
| Electrostatic Discharge (ESD) | 150 | V |
| Operating Temperature Range | -30°C to +80°C | |
| Storage Temperature Range | -40°C to +100°C | |
| Lead Soldering Temperature[4mm(.157") From Body] | 260°C for 5 Seconds | |



Electrical and optical characteristics(Ta=25 °c)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-----------------|------|------|------|---------------|-------------------|
| Luminous Intensity | I_v | - | 600 | - | mcd | $I_F=20\text{mA}$ |
| Viewing Angle | $2\theta_{1/2}$ | 110 | 120 | 130 | Deg | |
| Peak Emission | λ_p | 465 | 470 | 475 | nm | |
| Dominant Wavelength | λ_d | 460 | 465 | 470 | nm | |
| Spectral Line Half-Width | $\Delta\lambda$ | 10 | 15 | 20 | nm | |
| Forward Voltage | V_F | 2.8 | 3.2 | 3.6 | V | $V_R=5\text{V}$ |
| Reverse Current | I_R | | | 50 | μA | |


Typical Electrical Characteristics Curves (25 °c Ambient Temperature Unless Otherwise Noted)

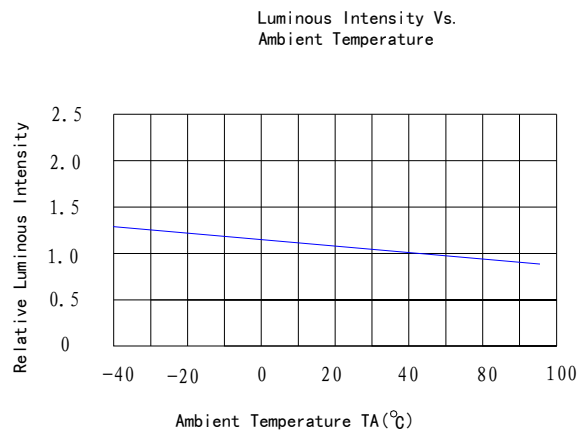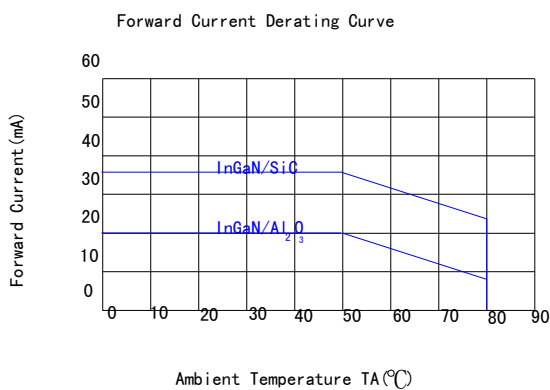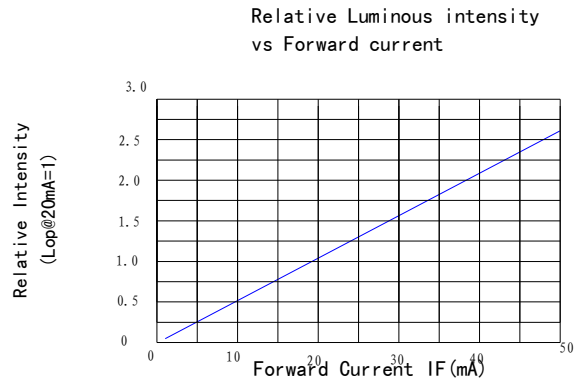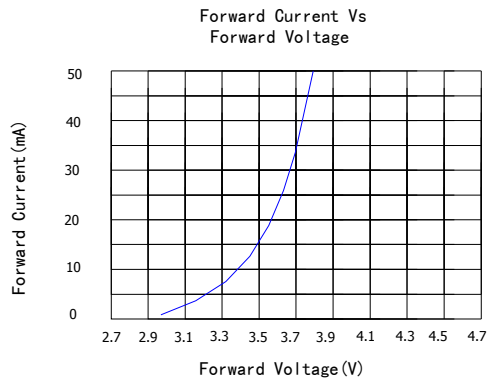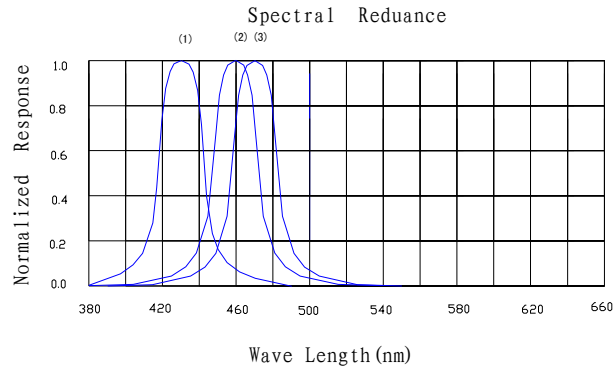


Flux LEDs PACKING.

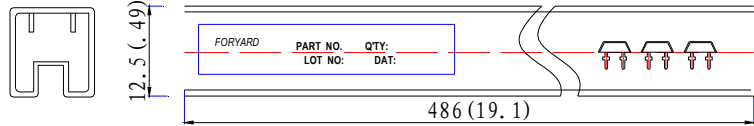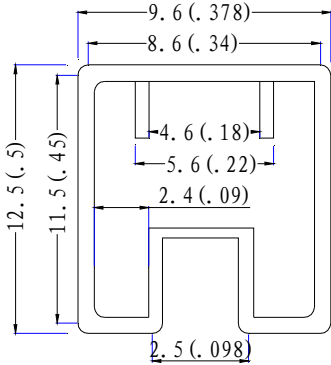


Adhesive Pipe
Dimension:mm(inches)
Each Adhesive Pipe 60 pcs




Box
Dimension (cm) : 53*15*16.5

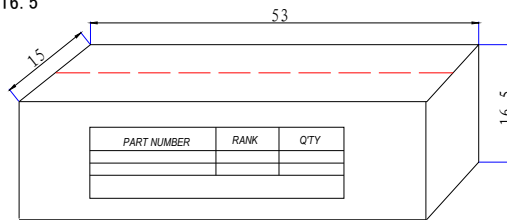

Each box/carotn 10,000pcs



CARTON
Dimension(cm):56*32*34.4

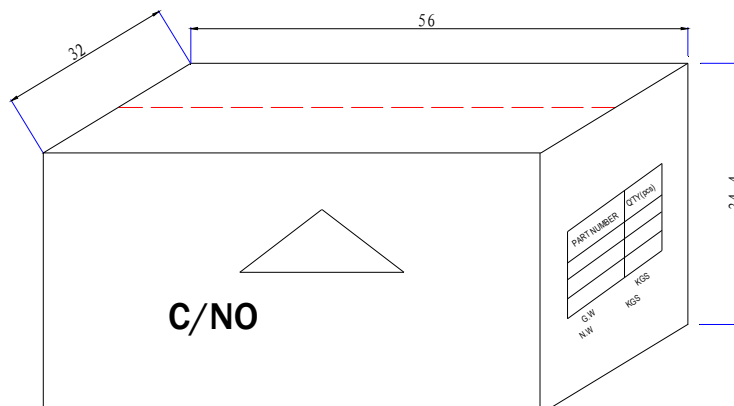

4 Boxes/Carton
Total :40,000pcs