


# **PRODUCT SPECIFICATION**

## Model No.: FYLS-3528RGBC-CA

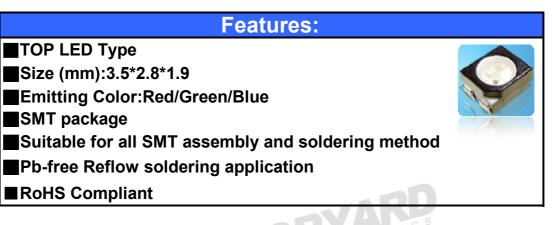

### **Applications:**

- ■Light Strips
- ■LCD Backlight
- Decorative lighting
- Indicators
- Interior automotive
- Illuminations
- Mobile Phones




#### NINGBO FORYARD OPTOELECTRONICS CO.,LTD Add:NO.115 Qixin Road Ningbo Zhejiang China Tel: 0086-574-87933652 87927870 87922206 Fax: 0086-574-87927917 E-mail:Sales@foryard.com (General) Http://www.foryard.com

**Zip:**315051



Model. No.	FYLS-3528RGBC-CA
Rev.	А



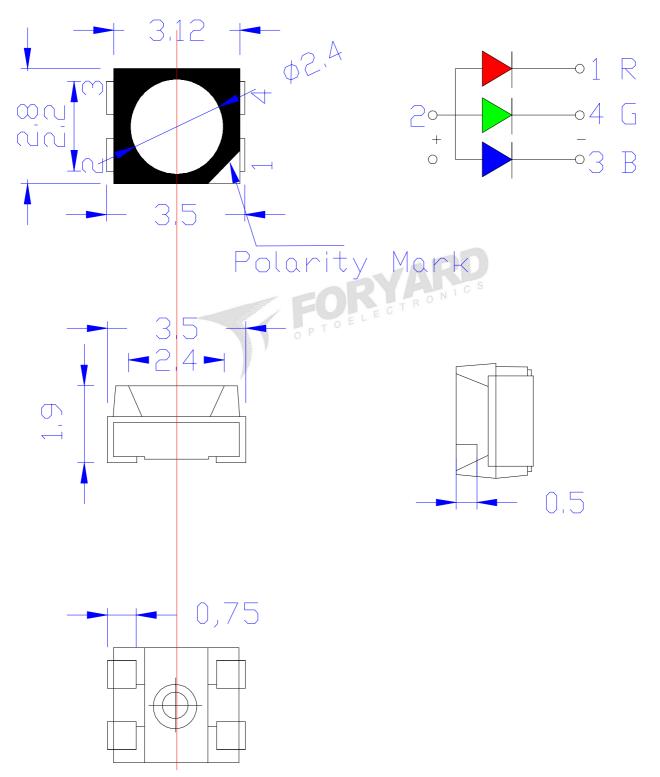

#### Notes:

1. Dimension in millimeter [inch], tolerance is  $\pm 0.25$  [.010].

2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



#### ■ Absolute Maximun Ratings(Ta=25° C)

Items	Symbol	Absolute m	Unit		
		R	G	В	Offic
Forward Current(DC)	IF	50	30	30	mA
Peak Forward Current*	IFP	100	100	100	mA
Power Dissipation	PD	100	100	100	Mw
Operation Temperature	Topr	-40° C	C∼+85° C		°C
Storage Temperature	Tstg	-40°C~+100°C		°C	
Reverse Voltage	VR	5		V	
Soldering Temperature	Tsol	F	Reflow So	dering:250	℃/5sec

#### \*Pulse width $\leq$ 1msec duty $\leq$ 1/10

#### ■ Typical Electrical &Optical Charcteristics(Ta=25°C)

Items	S	ymbol	Condition	Color	Min	Max	Unit	
		R			2.00	2.60		
Forward Voltage	VF	G	IF = 20mA		3.20	3.60	V	
		В			3.20	3.60		
Reverse Current	IR		VR = 5V			10	uA	
		R			630			
Peak Emission Wavelength	λр	G	IF = 20mA		525		nm	
		В			468			
		R			625			
Dominant Wavelength	λD	G	IF = 20mA	IF = 20mA		520		nm
		В			470			
		R			200			
Luminous Intensity	IV	G	IF = 20mA		800		mcd	
		В			250			
50% Power Angle		201⁄2	IF = 20mA		120		Deg	

#### Material

Item	Reflector		Reflector Wire		Chip
Material	R	PPA	Gold	Silicone	AlGaInP
Material	G	PPA	Gold	Silicone	InGaN
Material	В	PPA	Gold	Silicone	InGaN


Note:


1.Luminous Intensity is based on the Foryard standards.

2.Pay attention about static for InGaN




#### ■ Typical Eletrical/Optical Characteristics Curves(Ta=25° C Unless Otherwise Noted)

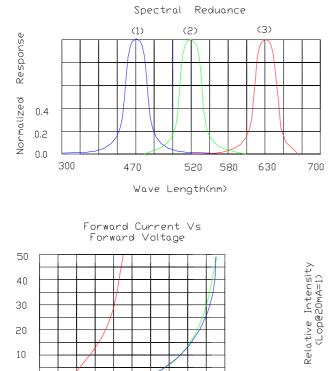



Relative Lumionous Intensity(LOP @max=1)


Relative Luminous intensity vs Forward current






Forward Current(mA)

0

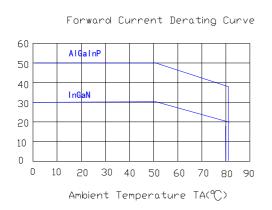

1.5 1.7 1.9 2.1 2.3 2.5 2.7 2.9 3.1 3.3 3.5


Forward Voltage(V)

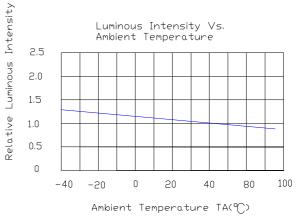




Model. No.	FYLS-3528RGBC-CA		
Rev.	A		



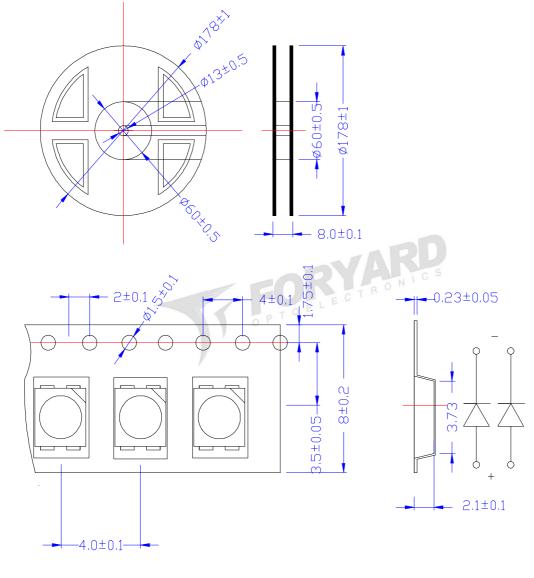


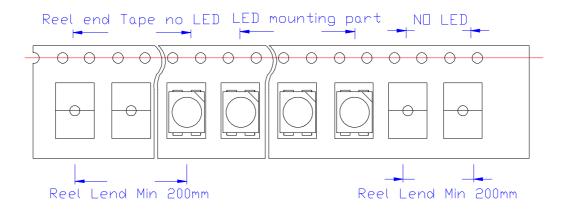


Note: The specifications are subject to change without notice. Please contact us for updated information.





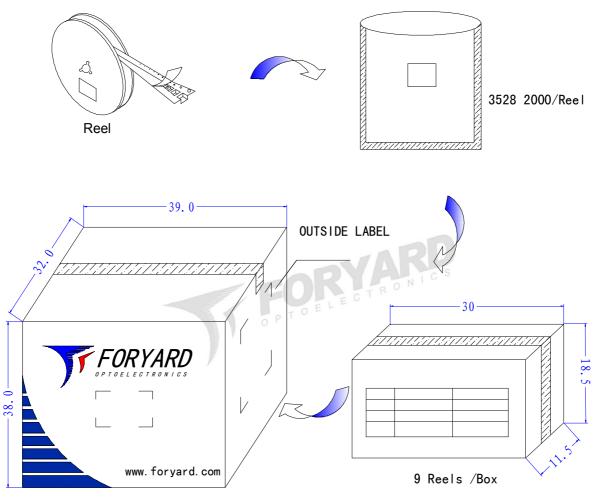

6 Boxes/Carton

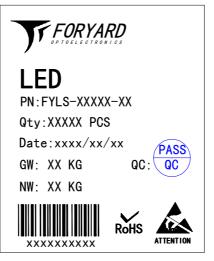

OUTSIDE LABEL

Note: The specifications are subject to change without notice. Please contact us for updated information.



Model. No. FYLS-3528RGBC-CA Rev. A

#### Model No.: FYLS-3528RGBC-CA

#### Precautions for use:

#### 1. Storage

To prevent moisture absorption into SMD LEDs during the transportation and storage , the LEDs are packed in a moisture-barrier bag. Desiccants and a humidity indicator are packed together with the LEDs as secondary protection

The shelf life of LEDs stored in the original sealed bag at <40  $^{\circ}$ C and < 90% RH is 12 months. Baking is required if the shelf life has expired

Before opening the packaging , check for air leaks in the bag.

After the bag is opened, the SMD LEDs must be stored at  $<30^{\circ}$ C and  $<60^{\circ}$ RH. Under these conditions,

SMD LEDs must be used within 24 hours. If the LEDs are not within 24 hours after removal from the bag,

baking is required Take the material out of the packaging bag before baking. Do not open the oven door

frequently during the baking process.

2. Soldering

(1) Manual soldering with a soldering Iron

Use a soldering iron of less than 25 watts is recommended . The iron temperature must be kept below  $315^{\circ}$ C And soldering time no more than 2 seconds.


The epoxy resin of an SMD LED should not contact the tip of the soldering iron.

No mechanical stress should be exerted on the resin portion of an SMD LED during soldering.

Handling of an SMD LED should be done only when the package has been cooled down to below  $40^{\circ}$ C

(2)Reflow soldering

Temperature profile

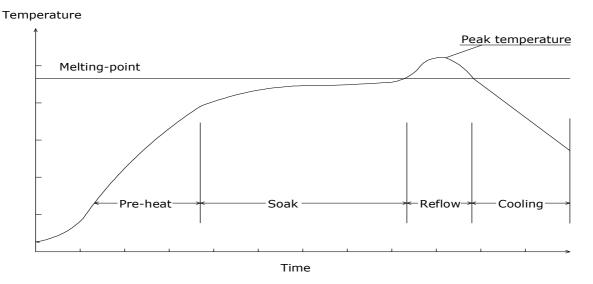



Solder=Sn63-Pb37	Solder= Pb-Free
Average ramp-up rate:4°C/sec.max	Average ramp-up rate:4°C/sec.max
Peak preheat temperature:100-150℃	Peak preheat temperature:100-150℃
preheat time:100seconds.max	preheat time:100seconds.max
ramp-down rate:6℃/sec.max	ramp-down rate:6℃/sec.max
Peak temperature:230℃	Peak temperature:250℃
Time within 5 $^\circ \!$	Time within 5 $^\circ \!$
Duration above 183 $^\circ \!$	Duration above 217 $^\circ\!$


SMD LED should not be modified after soldering. If modification cannot be avoided, the modification

must be pre-qualified to avoid damage to the SMD LEDs.

Reflow soldering should not be done more than one time

No stress should be exerted on the package during soldering.

(3) Recommend Soldering pad design(unit=mm)

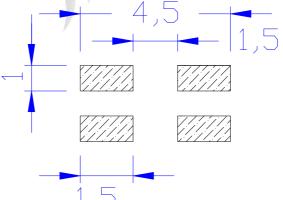

#### 3. Static Electricity

Static Electricity and surge voltage damage the LEDs. So it is recommended that an ESD wrist band,

ESD shoe strap or an anti-electrostatic glove be used when handling the LEDs.

All devices, equipment and machinery must be properly grounded

#### 4. Others

Reverse voltage should not exceed the absolute maximum rating on the data sheet. The colour of the LEDs is changed slightly an operating current and thermal.

This device should not be used in any type of fluid such as water, oil, organic solvent and etc

When washing is required, IPA (Isopropyl Alcohol) should be used.

The influence of ultrasonic cleaning on the leds depends on factors such as ultrasonic power and the way.

High-brightness LED light may injure human eyes. Avoid looking directly into lighted LED

The appearance and specifications of the product may be modified for improvement without notice.